

LENCO MARINE, INC.

2011 - 2012

RETAIL

EFFECTIVE SEPTEMBER 1, 2011

ELECTRIC HATCH LIFTS

(WITH 2' LEADS AND DEUTSCH CONNECTORS)

Inline motor design delivers over 500 lbs. / force. Includes vandar mounting brackets & SS pull pins. S = Short, all part #'s ending in S have the same stroke but in a 4" shorter length.

SWITCH SOLD SEPARATELY.

L.O.A. = Length Overall, measuring from top bracket to bottom bracket


12 VOLT MODELS

LENCO PART #	SUPERSEDED PART #	L.O.A. RETRACTED	APPROX. STROKE	L.O.A. EXTENDED	RETAIL PRICE
20760-001	HL-400	15"	4"	19"	\$ 348.50
20762-001	HL-600	20"	6"	26"	\$ 361.75
20764-001	HL-800S	20"	8"	28"	\$ 375.00
20766-001	HL-800	24"	8"	32"	\$ 375.00
20768-001	HL-1200S	24"	12"	36"	\$ 401.50
20770-001	HL-1200	29"	12"	41"	\$ 401.50
20772-001	HL-1400	33"	14"	47"	\$ 441.00
20774-001	HL-1600S	29"	16"	45"	\$ 441.00
20776-001	HL-1600	33"	16"	49"	\$ 441.00
20778-001	HL-2000S	33"	20"	53"	\$ 481.00
20780-001	HL-2000	37"	20"	57"	\$ 481.00
20782-001	HL-2400S	37"	24"	61"	\$ 521.75
20784-001	HL-2400	41"	24"	65"	\$ 521.75
20786-001	HL-2600	47"	26"	73"	\$ 560.50
20788-001	HL-3000	47"	30"	77"	\$ 560.50

24 VOLT MODELS

LENCO PART #	SUPERSEDED PART #	L.O.A. RETRACTED	APPROX. STROKE	L.O.A. EXTENDED	RETAIL PRICE
20761-001	HL-400/24V	15"	4"	19"	\$ 382.75
20763-001	HL-600/24V	20"	6"	26"	\$ 397.50
20765-001	HL-800S/24V	20"	8"	28"	\$ 412.00
20767-001	HL-800/24V	24"	8"	32"	\$ 412.00
20769-001	HL-1200S/24V	24"	12"	36"	\$ 441.00
20771-001	HL-1200/24V	29"	12"	41"	\$ 441.00
20773-001	HL-1400/24V	33"	14"	47"	\$ 484.75
20775-001	HL-1600S/24V	29"	16"	45"	\$ 484.75
20777-001	HL-1600/24V	33"	16"	49"	\$ 484.75
20779-001	HL-2000S/24V	33"	20"	53"	\$ 528.50
20781-001	HL-2000/24V	37"	20"	57"	\$ 528.50
20783-001	HL-2400S/24V	37"	24"	61"	\$ 572.25
20785-001	HL-2400/24V	41"	24"	65"	\$ 572.25
20787-001	HL-2600/24V	47"	26"	73"	\$ 616.00
20789-001	HL-3000/24V	47"	30"	77"	\$ 616.00

HATCH LIFT ACCESSORIES

70381-001	HL-SB	SS SLIDE BRACKET (WITH HARDWARE)	\$ 59.75
60101-001D	121 SS	SS PULL PIN FOR HATCH LIFTS (1)	\$ 13.75
15096-001		SINGLE ROCKER SWITCH FOR SINGLE HL APPLICATION WITH DEUTSCH REPT. & TWO 30" NON-TERMINATED POWER LEADS. CLAM-SHELL PACKAGED.	\$ 58.50
15098-001		SINGLE ROCKER SWITCH FOR DUAL HL APPLICATION WITH DEUTSCH REPTS. & TWO 30" NON-TERMINATED POWER LEADS. CLAM-SHELL PACKAGED.	\$ 70.00

ORDER ACTUATOR EXTENSION HARNESSES FROM OUR COMPONENTS PAGES 20.

Hatch Lift



LENCO MARINE, INC.


2011 - 2012

RETAIL PRICING

EFFECTIVE SEPTEMBER 1, 2011

Lenco Hatch Lifts

- Sizes available with 4" thru 30" stroke. Available in 12 and 24 volt
 - Complete with 2' lead and Deutsch plug (actuator extension harnesses are available in lengths of 7', 14', 20', 26', 32' and 45')
 - Clutchless ball screw design will not drift, never binds, and runs in sync on dual lift applications
 - Inline motor design delivers over 500 lbs. (226.79 kg) of force
 - Completely submersible, made entirely of non-corrosive materials
 - Ball screw spins freely when hatch is fully opened or closed eliminating limit switches and burned out motors
 - Vandar mounting brackets with stainless steel pull pins
 - Powdered metal gears for strength & precision
 - Stainless steel ram locks in any position
 - AMP draw 10 amps at 12 Volt and 5 amps at 24 Volt
 - CE Certified and ABYC Compliant
 - O-Ring sealed at 1,000 PSI

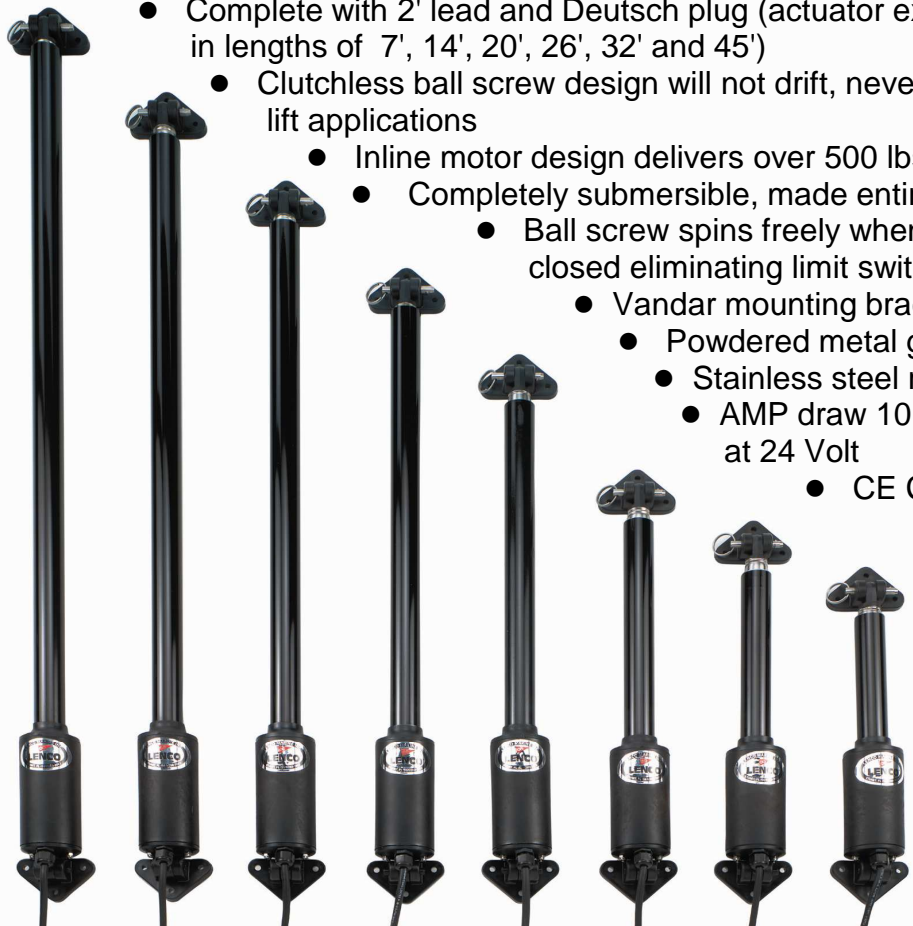

Single Rocker Switch for Hatch Lifts. Complete with two 30" non-terminated power leads, Deutsch receptacle(s), and hardware.

15096-001 for Single Hatch Lift Applications - Packaged

15098-001 for Dual Hatch Lift Applications - Packaged



Optional Stainless Steel Non-Locking Slide Bracket

70381-001

In case of power failure, this bracket allows you to pull the hatch open 4" in order to remove pull pin for access.